




NB: AT THE TIME OF ORDER, PLEASE NOTIFY THE VOLTAGE OF THE ELECTRICAL SYSTEM (12-24 V)

THE HAND'O'LOCK QUICK COUPLER ALLOWS THE FAST REPLACEMENT OF THE ATTACHMENT TOOLS. THANKS TO ITS SIMPLE AND STRONG FRAME IT CAN RELY ON AN EXCELLENT QUALITY-PRICE RATIO. IN ITS HYDRAULIC VERSION WITH ITS **DOUBLE ACTION** SYSTEM, IT ENABLES THE FULLY AUTOMATIC LOCKING AND UNLOCKING OPERATIONS.


MECHANIC

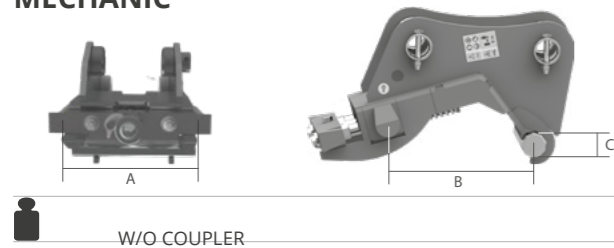

TONS (LB)	0,6 - 1,2 (1323 - 2646)	0,6 - 4,0 (1323 - 8818)	4,0 - 10,0 (8818 - 22046)
MOD.	CW 00	CW 05	CW 10
A	MM (IN) 144 (5,7)	175 (6,9)	305 (12)
B	MM (IN) 150 (5,9)	200 (7,9)	300 (11,9)
C	MM (IN) 30 (1,2)	40 (1,6)	50 (2)
	KG (LB) 10 (22)	14 (31)	42 (93)

W/O COUPLER

HYDRAULIC DOUBLE ACTION

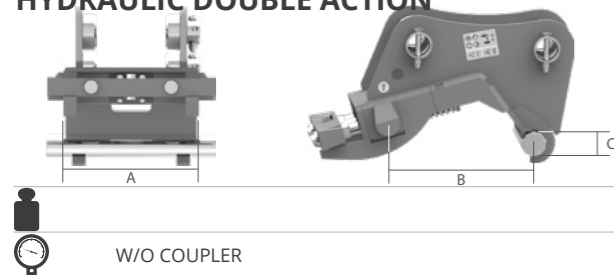

TONS (LB)	0,6 - 4,0 (1323 - 8818)	4,0 - 10,0 (8818 - 22046)	7,5 - 15,0 (16535 - 33069)	15,0 - 25,0 (33069 - 55116)
MOD.	CW 05 D.E.	CW 10 D.E.	CW 20S D.E.	CW 20 D.E.
A	MM (IN) 175 (6,9)	305 (12)	420 (16,5)	550 (21,6)
B	MM (IN) 200 (7,9)	300 (11,9)	475 (18,7)	475 (18,7)
C	MM (IN) 40 (1,6)	50 (2)	60 (2,3)	60 (2,3)
	KG (LB) 15 (33)	43 (95)	110 (242,5)	180 (396,8)
	bar (psi) 250 (3626)	250 (3626)	250 (3626)	250 (3626)

W/O COUPLER

MAX

ON REQUEST ON REQUEST



OPTIONAL

- 1 HYDRAULIC INSTALLATION KIT**
WITH THE HYDRAULIC QUICK COUPLER THE INSTALLATION KIT CAN BE PROVIDED, INCLUDING SOLENOID VALVE AND ELECTRIC SWITCH WITH MAGNETS TO EASILY PUT IT INSIDE THE CAB
- 2 LIFTING HOOK**
UPON REQUEST, A LOADING HOOK WILL BE FITTED, COVERED WITH AN APPROVAL ON THE CONFORMITY DECLARATION OF OUR PRODUCT.
NB* THE LIFTING CAPACITY OF THE HOOK IS ADJUSTED ACCORDING TO THE SUPPORT TO WHICH THE HOOK IS APPLIED. THIS CAPACITY IS INDICATED IN THE PRODUCT'S OWNER'S MANUAL.
- 3 CW ON HINGE**
RECOMMENDED APPLICATION ON BUCKETS.
- 4 CW FOR TILTING BUCKETS**
RECOMMENDED APPLICATIONS ON TILTING BUCKETS.
- 5 REVERSE CW**
RECOMMENDED APPLICATION ON FLAT PLATES, SUCH AS ADAPTER PLATES, MULCHERS, SHEARS, ETC.
- 6 REVERSIBLE CW**
RECOMMENDED APPLICATIONS ON BUCKETS USED IN BACK OR FRONT DIGGING WORKS.